

Product information

The SecuriSens LIST system is an addressable, line-type heat detector for special applications. It is characterised by its precise detection, high reaction speed, simple installation and commissioning, plus its maintenance-free design. The redundancy function, different sensor intervals and branches in the sensor cable allow for the perfect solution for any application. With up to 3200 metres of SEC 20 sensor cable on one LISTcontroller cable terminal processor, LIST is primarily used in tunnels and industrial applications that cover great lengths.

SecuriSens LIST



Line-type heat detector (linear sensing of temperature)

Design and function

The SecuriSens LIST system is based on acquiring data from numerous temperature sensors that are integrated in the sensor cable at regular intervals. The system measures both the actual heat temperature of the surroundings (convective heat) as well as a fraction of the infrared irradiation (radiant heat). Thanks to these properties and a polling cycle of 10 seconds, the response time of the line-type heat detector is extremely short. The intelligent LISTcontroller cable terminal processor evaluates the measurement data and determines instances of alarms or pre-signals based on the specific programming. The «LIST Config» web interface is a flexible programming environment that makes it possible to program the cable terminal processor easily according to the project-specific requirements. Remote access is also possible via TCP/IP for maintenance purposes. The optional programmable relays can be used for actuating the necessary systems in the event of an alarm or fault.

Applications

Thanks to its excellent resistance to extreme environmental conditions, the SecuriSens LIST is used wherever conventional point detectors are not able to guarantee optimal protection.

Typical applications include:

- Road tunnels
- Railway and metro tunnels
- Long cable and supply tunnels
- Long conveyor belts

SEC 20 sensor cable

Semi-conductor temperature sensors are located inside the sensor cable at freely selectable intervals, depending on the respective application. These are electrically connected to one another using a ribbon cable. The ribbon cable with temperature measuring points is surrounded by fill material that provides

an aluminium shield against electromagnetic influences. The cable sheath seals off the cable tightly on all sides and is made from flame-retardant, halogen-free material. The standard sensor intervals are 2 metres, 4 metres, 5 metres, 8 metres and 10 metres. Other sensor intervals of between 50 cm and 10 metres are possible on request.

LISTcontroller cable terminal processor

The LISTcontroller is the central cable terminal processor, with one central processor and two peripheral processors for continuous, quick and reliable temperature monitoring together with the SEC 20 sensor cable. Up to 2x 3200 metre sensor cables or 350 individual sensor points are polled every 10 seconds and then evaluated according to various criteria. A fire alarm is triggered when either the temperature at a measuring point exceeds a set threshold, or when a specific temperature increase is recorded over time (differential behaviour). Both alarm thresholds can be freely programmed for up to 254 configurable fire sections. False alarms caused by natural temperature fluctuations can be minimised through special evaluation algorithms. Alarms are made both visually on the front of the device via LEDs and the plain text display in eight different languages, and also via potential-free contacts for forwarding electrically to other computer systems and control systems or to a fire alarm control panel. Faults are detected immediately and signalled thanks to the continuous polling of the sensor data.

Data interfaces and networking


Various interfaces (such as RS-232, RS-485 and Ethernet) are available for transmitting the alarm, temperature and status values to superordinate systems, as are different protocols such as Modbus RTU, Modbus TCP or IEC 60870-5-104. Multiple LISTcontroller units can be networked via LAN and then evaluated or

- Line-type heat detector based on the multiple point principle (sensor cable)
- VdS approval in compliance with EN 54-22, Class A1
- Sensor intervals of between 50 cm and 10 metres
- Sensor cable length up to 3200 metres or 350 sensors per cable terminal processor
- Loop-back and redundancy function
- Branches in the sensor cable
- Intelligent cable terminal processors with relays and interfaces
- Free assignment of the sensors to groups
- Freely adjustable detection properties for each group (max./diff.)

programmed centrally. Event data and maintenance data can be read out and configuration data can be copied via a USB connection.

System design

A SecuriSens LIST system consists of at least one LISTcontroller and one connected SEC 20 sensor cable. A connection cable can also be installed between the cable terminal processor and sensor cable, to which it is connected via

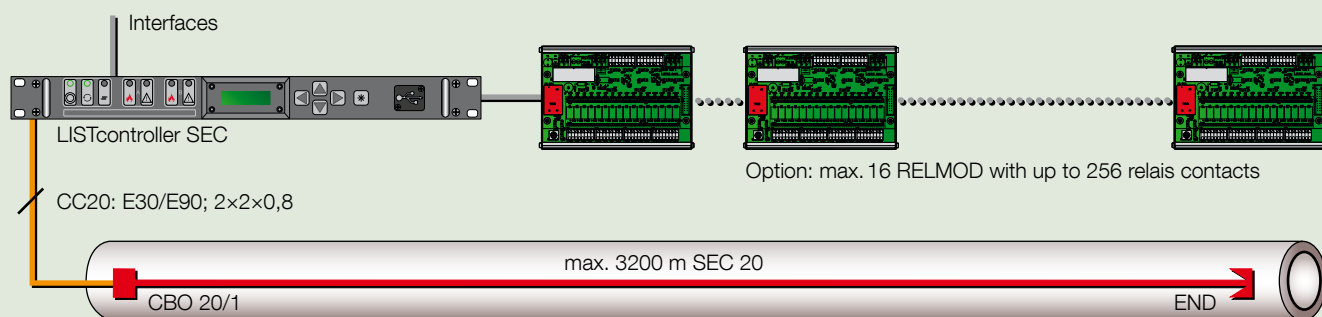

Stub installation

a CBO connection box. Branches in the sensor cable, the connection of individual sensor cable sections via cable and the combination of different sensor intervals are also possible. One special feature of the LIST system is the possibility of implementing systems with increased availability or redundancy through loop-back and RDT (Rerouted Data Transmission). With loop-back (one LISTcontroller), interruptions in the sensor or connection cable are automatically detected. With RDT (two LISTcontrollers), the failure of a cable terminal processor is also detected. In both cases, the system reconfigures itself automatically and continues to be fully accessible (see the three diagrams on stub, loop-back and RDT).

RELMOD relay module

The RELMOD is a relay extension for the LISTcontroller. Each RELMOD has 16 potential-free contacts that can be programmed to signal an alarm, pre-signal or fault per group. Up to 16 RELMOD modules can be connected to one LISTcontroller via RS-485. The relay contacts can be directly fitted with loop resistors for monitoring the quiescent current when connecting to a collective fire alarm line. The RELMOD also has inputs for targeted alarm release, adjusting the maintenance mode and integrating

third-party alarms, plus for deactivating the differential behaviour for certain sensor groups and for a specific time. This can be practical next to doors on loading bays or cold storage rooms to prevent false alarms caused by sudden bursts of warm air, for example.

Mounting

The sensor cable is mounted with plastic CLIC clamps as standard. The maximum spacing between the clamps is 1.2 metres. Stainless steel clamps and other special fastening systems are available for special requirements.

Configuration


With the help of a web interface, the LIST system can be adjusted to the application with exceptional ease and flexibility. Any number of sensors can be grouped together. The maximum and differential temperature thresholds per sensor group can be programmed individually.

Maintenance

The SecuriSens LIST system is largely maintenance free. The position of the temperature sensors remains the same even years later, and does not have to be recalibrated. A check of the response characteristics can be made with minimal effort thanks to the mobile, battery-powered STE 515 sensor testing device, even in high tunnels.




RELMOD relay module

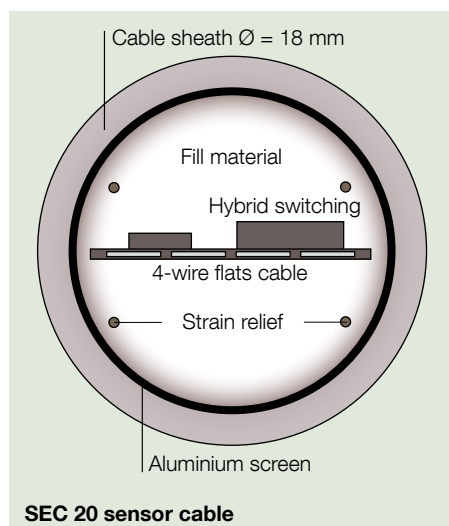

SEC 20 sensor cable

Technical data – SEC 20 sensor cable

Standard sensor intervals	2 m, 4 m, 5 m, 8 m, 10 m (others from 0.5 m to 10 m possible)
Maximum cable length	3200 m (incl. connection cable CC)
Maximum number of sensors	350 (VdS approved 320)
Measuring range	-40 °C to +200 °C
Operating temperature, continuous	-40 °C to +85 °C
Operating temperature, short-term	+200 °C
Resolution	0.1 °C
Cable sheath material	Halogen free, flame retardant (according to EN 60332-1-2, EN 60332-2-2 and IEC 60754-1)
Diameter	18 mm
Weight per metre	0.45 kg/m
Colour	Grey
Min. bending radius	0.30 m
Installation temperature	> +10 °C
VdS approval in compliance with EN 54-22	G 213072

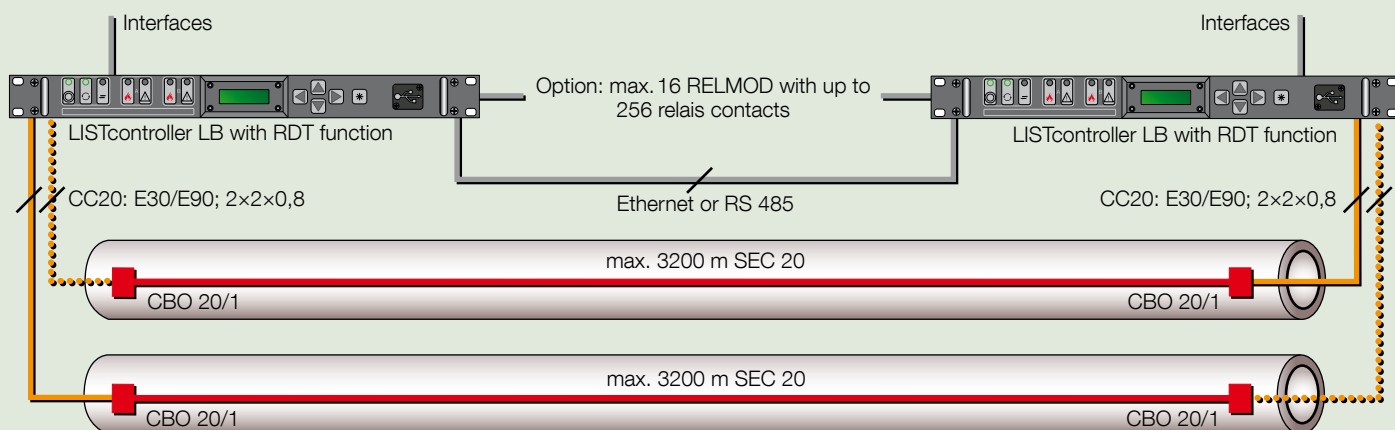

Redundant RDT installation

SecuriSens LIST range

LCON SEC	LISTcontroller with one sensor cable connection
LCON LB	LISTcontroller with two sensor cable connections for loop-back or RDT operation
LCON RDT	RDT function for LISTcontroller (function for redundancy in pairs)
LCON I/P Modbus	MODBUS, MODBUS TCP software function on LISTcontroller
LCON I/P IEC	IEC 60870-5-104 software function on LISTcontroller
RELMOD	Relay module with 16 relays and 8 inputs
RDU 316	RDU 316 with plain-text display, three lines of 16 characters, for connecting to a LISTcontroller via RS-485 interface
SEC 20/02	Sensor cable with 2 metres sensor interval
SEC 20/04	Sensor cable with 4 metres sensor interval
SEC 20/05	Sensor cable with 5 metres sensor interval
SEC 20/08	Sensor cable with 8 metres sensor interval
SEC 20/10	Sensor cable with 10 metres sensor interval
CLIC 17	CLIC TOP 17 cable clamps
MDP 20	Plastic clamp and dowel with stainless steel screw
MDJ 40	Stainless steel clamp, 1.4571, with stainless steel dowel and cable tie
MDC 20	Stainless steel clamp with restraining bar
CBO 20/0	Connection box between two sensor cables
CBO 20/1	Connection box for one sensor cable with connection module
CBO 20/3	Connection box for two or three sensor cables with two connection modules
CC 20	CC 20 connection cable (orange)
LCT 20	Cable tester for SEC 20, battery operated
CSM 200	Sensor cable simulator for 200 sensors
END	End cap

Specifications subject to change without notice. Delivery subject to availability.



MDC 20



CLIC 17



MDJ 40